

7610 models feature fully enclosed, 127 mm scale, borosilicate glass metering tube with 304 stainless steel case. In-line 316L fittings and internals or PVC fittings with Hastelloy® C-276 internals are suitable for a variety of applications



DESCRIPTION

Metering Tube

Borosilicate Kinglass

Internal Components

Standard: 316L Stainless Steel

Optional: Hastelloy® C-276

Inlet/Outlet Fittings

FNPT, Vertical

Fitting Material

Standard: 316L Stainless Steel

Optional: PVC

Elastomers

Standard: Viton®

Optional: Buna N, EPR, and

Kalrez®

Case and Covers

304 Stainless Steel Case

Polycarbonate Shield

PERFORMANCE

Capacities

0.25 to 116 GPM — Water

1 to 245 SCFM — Air

Scale

127 mm (5")

Direct Reading, Detachable 5

Accuracy

± 3% of Full Scale Flow

Turndown

10:1 unless otherwise indicated

Repeatability

0.5%

Max Temperature

316L SS Fittings — 200° F (93° C)

PVC Fittings — 110° F (43° C)

Max Pressure

316L SS Fittings — 250 psig, size 3 & 4

316L SS Fittings — 200 psig, size 5 & 6

316L SS Fittings — 150 psig, size 8 & 9

PVC Fittings — 100 psig

Ambient Temperature

33° F to 125° F (1° C to 52° C)

OPTIONS

Alarm

Latching Reed Switch (see page 49)


Certified Calibrations

Conform to ISA RP 16.6

Scales

Can be produced in any volumetric unit


Float Types

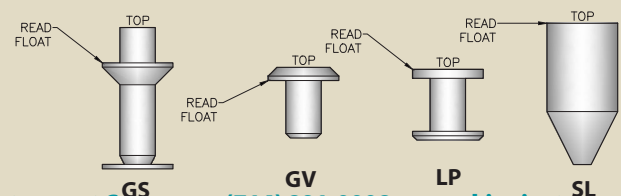

SPECIFICATIONS:

Order No.	Full Scale Flow GPM - Water	Alarm Opt.	Order No.	Full Scale Flow SCFM - Air	Alarm Opt.	Float Number	Float Type	Press. Drop In W.C	Tube Size - Number	Dimensions (Inches)				Connection Size FNPT
										A	B	C	D	
31W	.25	No	31A	1.0	No	3/8-LPG-01	LP	—	3G - 3/8-20-G-5	11.875	3.15	3.125	9.50	1/2"
32W	.36	No	32A	1.5	No	3/8-SLG-01	SL	2	3G - 3/8-20-G-5	11.875	3.15	3.125	9.50	1/2"
33W	.74	No	33A	3.0	No	3/8-SLG-02	SL	5	3G - 3/8-20-G-5	11.875	3.15	3.125	9.50	1/2"
41W	1.0	No	41A	4.2	No	1/2-LPG-01	LP	6	4G - 1/2-27-G-5	11.875	3.15	3.125	9.50	1/2"
43W	2.0	Yes	43A	8.2	Yes	1/2-SLG-01	GS	10	4G - 1/2-27-G-5	11.875	3.15	3.125	9.50	1/2"
51W	1.5	No	51A	6.0	No	3/4-LPG-01	LP	3	5G - 3/4-30-G-5	13.75	3.95	3.875	10.60	1"
52W	3.8	Yes	52A	16.0	Yes	3/4-GSG-01	GS	10	5G - 3/4-30-G-5	13.75	3.95	3.875	10.60	1"
53W	5.0	Yes	53A	21.5	Yes	3/4-SLG-01	SL	14	5G - 3/4-30-G-5	13.75	3.95	3.875	10.60	1"
61W	6.0	No	61A	25.5	No	1-GVP-01	GV	5	6P - 1-33-P-5	13.75	3.95	3.875	10.60	1"
62W	7.4	No	62A	30.0	No	1-GVP-02	GV	6	6P - 1-33-P-5	13.75	3.95	3.875	10.60	1"
63W	9.6	No	63A	40.0	No	1-GSP-01	GS	10	6P - 1-33-P-5	13.75	3.95	3.875	10.60	1"
64W	11.0	No	64A	45.0	No	1-GSP-02	GS	13	6P - 1-33-P-5	13.75	3.95	3.875	10.60	1"
65W	14.0	No	65A	62.0	No	1-GSP-03	GS	24	6P - 1-33-P-5	13.75	3.95	3.875	10.60	1"
66W	20.0	Yes	66A	90.0	Yes	1-SLP-01	SL	39	6P - 1-33-P-5	13.75	3.95	3.875	10.60	1"
67W	26.0	Yes	—	—	—	1-SLP-02	SL	45	6P - 1-33-P-5	13.75	3.95	3.875	10.60	1"
81W	22.0	Yes	81A	90.0	Yes	1 1/2-GVP-01	GV	16	8P - 1 1/2-34-P-5	16	5.312	5.375	11.80	2"
82W	44.0	Yes	82A	180.0	Yes	1 1/2-SLP-01	SL	30	8P - 1 1/2-34-P-5	16	5.312	5.375	11.80	2"
83W	61.0	Yes	83A	250.0	Yes	1 1/2-SLP-02	SL	40	8P - 1 1/2-34-P-5	16	5.312	5.375	11.80	2"
91W	41.0	Yes	91A	160.0	Yes	2-GVP-01	GV	5	9P - 2-33-P-5	16	5.312	5.375	11.80	2"
92W	60.0	Yes	92A	245.0	Yes	2-GSP-01	GS	16	9P - 2-33-P-5	16	5.312	5.375	11.80	2"
93W	86.0	Yes	—	—	—	2-SLP-01	SL	25	9P - 2-33-P-5	16	5.312	5.375	11.80	2"
94W	116.0	Yes	—	—	—	2-SLP-02	SL	45	9P - 2-33-P-5	16	5.312	5.375	11.80	2"

DIMENSION DIAGRAM

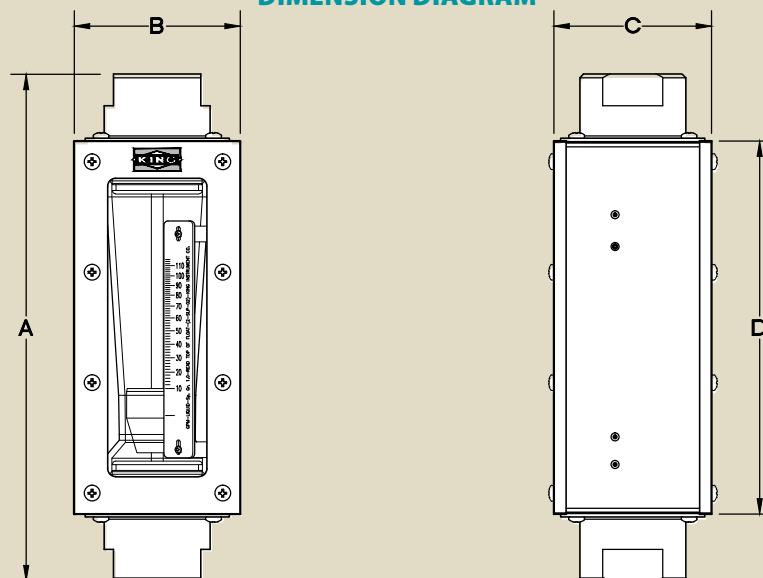

ORDERING:

Use the following guide to determine the specific product number you require.

Meter Series	Fitting Material	Float Material	O-Ring Material	Alarm Option	Order Number
7 6 1	316L SS - 2 PVC (not for air service) - 3	316L SS - 2 Hastelloy® C-276 - 4	EPR - 1 Buna - N - 2 Viton® - 3 Kalrez® - 4	No Alarm - 0 Alarm - A	See Specification Table Above